


- Two-piece design facilitates inspection and repair.
- Blow-out-proof stem.
- Anti-Static design is standard.
- Temperature range: -20 to 400
- Face to face: JIS B 2212.
- Flange dimensions: JIS B 2212.
- Pressure rating: JIS 10K.
- With ISO5211 Mounting Pad.



Two Piece Flange Ball Valves

DIMENSIONS (mm)

SIZE	ød	øB	øC	øD	K	L	T	f	øn	N	H	J	M	øp	S
1/2"	15	51	70	95	145	108	12	1	15	4	66	13	M5	42	9
3/4"	20	56	75	100	145	117	14	1	15	4	69	13	M5	42	9
1"	25	67	90	125	165	127	14	1	19	4	89	15.5	M6	50	11
1 1/4"	32	76	100	135	230	139.7	16	2	19	4	94	15.5	M6	50	11
1 1/2"	38	81	105	140	230	165	16	2	19	4	107	24	M8	70	17
2"	50	96	120	155	230	178	16	2	19	4	122	24	M8	70	17
2 1/2"	65	116	140	175	230	190	18	2	19	4	138.7	39.7	M8	70	17

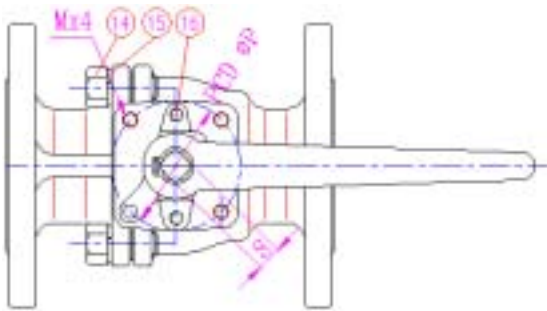

MATERIALS LIST

No.	PART NAME	SPECIFICATION	Q'TY
1	BODY	SCS13, SCS14, SCS16	1
2	CAP	SCS13, SCS14, SCS16	1
3	BALL	SCS13, SCS14, SCS16	1
4	SEAT	PTFE	2
5	GASKET	PTFE	1
6	STEM	SUS304, SUS316, SUS316L	1
7	THRUST WASHER	PTFE	1
8	PACKING	PTFE	3
9	STEM PACKING	PTFE	1
10	GLAND	SCS13	1
11	TRAVEL STOP	SUS304	1
12	SNAP RING	SUS304	2
13	HANDLE	FCD40, SCS13	1
14	BOLTS	SUS304	4(2 1/2" -6)
15	BOLT WASHER	SUS304	4(2 1/2" -6)
16	BOLTS	SUS304	2
17	STATIC DEVICE	SUS304	2

